


Application story


WANNERTM
HYDRA-CELL[®] PRO
SEAL-LESS PUMP TECHNOLOGIES

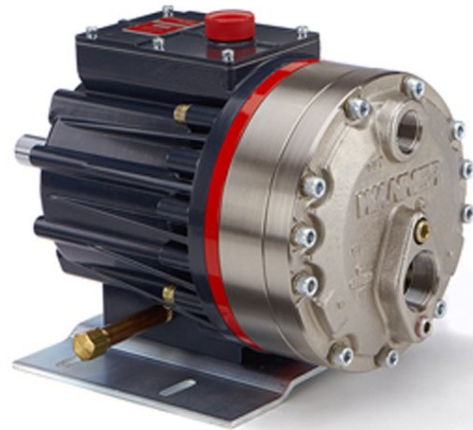

Boiler Feed Water for Indian Power Station

Location	India	Hydra-Cell model	G25XDCTHFEHB
Type of application	Boiler Feed Water	Flow rate	Up to 70 l/min (18 gpm)
Liquid	Water	Pressure	Up to 14 bar (200 psi)
Application details	Ten years after installation, a Hydra-Cell G25 pump, chosen as auxiliary boiler feed pump at a power generating plant in south India was recently reported to be operating without problems. Maintenance is minimal. "The pump has not been opened in the 10 years," say plant staff. The G25 is pumping very hot water at flow rates up to 70 l/min and pressures to 14 bar. Performance has been consistent, with constant flow, stable pressure and no leaks. Operation is quiet, with little vibration.		
Advantages of Hydra-Cell pump on this application	Leak-free. Low maintenance. Low vibration. Constant flow, stable pressure. Durability.		

www.hydra-cell.co.uk

Wanner Engineering -
World Headquarters & Manufacturing
Minneapolis USA
t: (612) 332-5681
e: sales@wannereng.com

Wanner International
Hampshire UK
t: +44 (0) 1252 816847
e: sales@wannerint.com

Wanner Pumps
Shanghai CHINA
t: +86-21-6876 3700
e: sales@wannerpumps.com

Wanner Pumps
Kowloon HONG KONG
t: +852 3428 6534
e: sales@wannerpumps.com