

WANNER™ HYDRA-CELL® PRO


Technical Bulletin TB0089

SUBJECT: Updated Q155 main bearing retention

Pump Models Affected: All Q155 Wanner™ Hydra-Cell® pump models.
– All pressure ratings.

Overview:

Two 177-118 set screws used to hold 209-041 main bearings are being replaced with 209-042 low-head cap screws. The torque required is 50 ft-lbf (68 N-m) with Loctite 242.

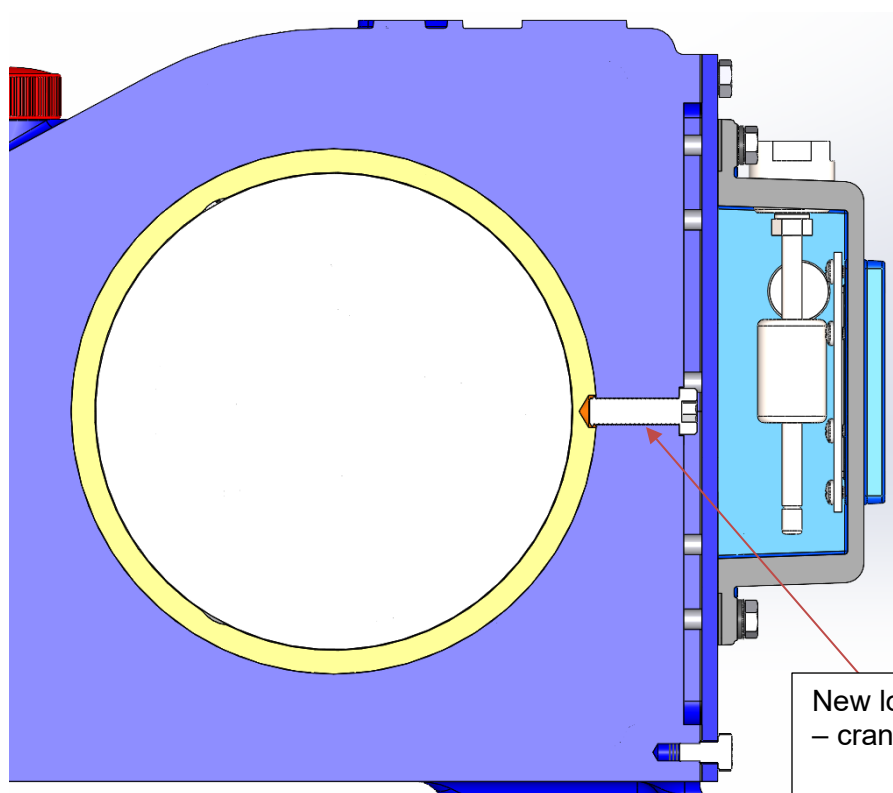

New low head cap screw replaces set screw
– crankcase is backwards compatible

WANNER ENGINEERING, INC.
World Headquarters & Manufacturing
1204 Chestnut Avenue
Minneapolis, MN 55403 USA
t: 612-332-5681
f: 612-332-6937
e: sales@wannereng.com
Hydra-Cell.com

WANNER INTERNATIONAL, LTD.
EMEA / Australia
8 & 9, Fleet Business Park
Sandy Lane, Church Crookham
Hampshire GU52 8BF, England
t: +(44) 01252 816847
f: +(44) 01252 629242
e: support@wannerint.com
Hydra-Cell.co.uk

WANNER PUMPS, LTD.
Asia / Pacific
Flat A, 21/F
Chatham Commercial Building
399 Chatham Road North
Hung Hom, Kowloon, Hong Kong
t: +(852) 3428-6534
f: +(852) 3188-9145
e: sales@wannerpumps.com
WannerPumps.com

WANNER INDIA PVT. LTD.
India
Mumbai, India
t: +91 (22) 22044766
e: support@wannerindia.com
WannerIndia.com