

Identifying Metallic Components

Because it is difficult to distinguish between the materials used, identification marks have been added to several machined metallic components of Hydra-Cell Pumps and Valves (not on stamped or ceramic components).


NOTE: Some Hastelloy C components were formerly stamped with an "H" for easy identification. This is no longer being done.

NOTE: You will also notice that we are using a new heat-treating process that does not discolor the components.

Plunger (C-22, C-23, and C-24 Valves)

Identified by the presence or absence of ridges around the tapered end:


- 17-4 SST: 2 ridges
- 316 SST: 1 ridge
- Hastelloy C: No ridges

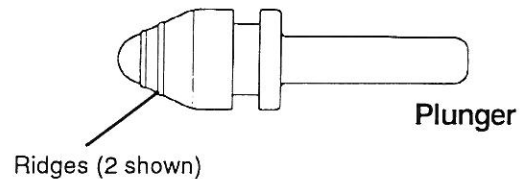

Plunger Seat (C-22, C-23, and C-24 Valves)

Identified by the presence or absence of circular V-shaped grooves on one face:


- 17-4 SST: 2 grooves
- 316 SST: 1 groove
- Hastelloy C: No grooves

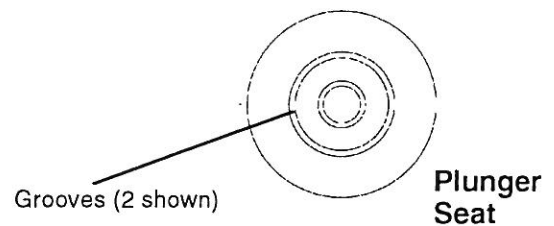

Valve (Pumps)

Identified by the presence or absence of circular .003-in. ledges on one face:


- Nitronic 50: 3 ledges
- 17-4 SST: 2 ledges
- 316 SST: 1 ledge
- Hastelloy C: No ledges

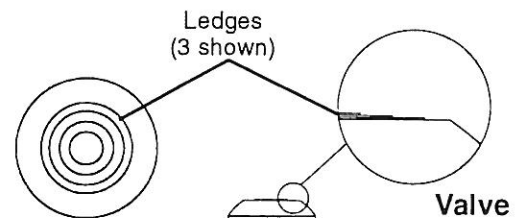

Valve Seat (Pumps)

Identified by the presence or absence of circular V-shaped grooves on one face:

- Nitronic 50: 3 grooves
- 17-4 SST: 2 grooves
- 316 SST: 1 groove
- Hastelloy C: No grooves

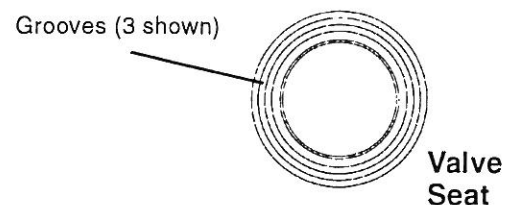

WANNER ENGINEERING, INC.

1204 Chestnut Avenue, Minneapolis, MN 55403
TEL: (612) 332-5681 FAX: (612) 332-6937
TOLL-FREE FAX [U.S. only]: (800) 332-6812